


CHAIN/HOOKS series

Hook

- Hot forged, excellent strength and toughness.
- Bottom hook swivels through 360 degrees.
- Safety catches on top and bottom hooks.

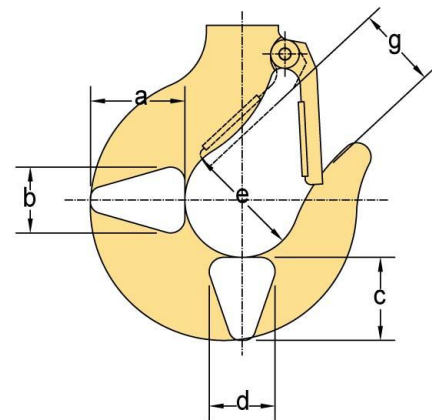


DIMENSIONS(mm)

CAPACITY (Ton)	T/B	a	b	c	d	e	g
0.5,1	T&B	33	23	29	23	40	29
2	T&B	45	31	41	31	46	37
3	T&B	55	34	48	34	52	40
5	T&B	67	45	60	45	62	46
7.5	T&B	85	60	78	60	80	55
10	T&B	100	70	95	65	100	64
15	T&B	120	87	110	85	120	82
20	T&B	140	100	130	95	140	105

T...TOP HOOK B...BOTTOM HOOK

CHAIN

Japanese-made FEC 80 super alloy steel, heat-treated chain is suitable for applications in harsh operating environments..

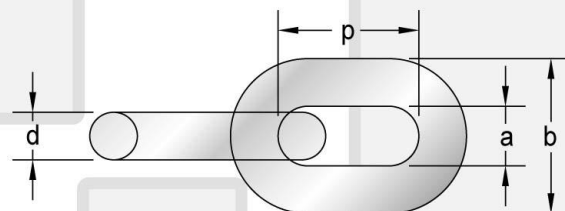

DIMENSIONS(mm)

Hoist Capacity (Ton)	Series		d Trade Size(mm)	a Inside Width(mm)	b Outside Width(mm)	p Inside Length(mm)	Weight Per Meter (kg/m)	Working Load Limit (kgf)	Proof Load (kgf)	Breaking Load (kgf)
	Single speed	Dual speed								
0.5	L/K	LD/KD	7.1	8.9	23.6	21.0	1.1	1600	3150	6300
1	H/K	HD/KD								
	NL/K	—								
	NH/K	—								
	L/K	LD/KD								
2	H/K	HD/KD								
	E/K	—								
	NL/K	—								
	NH/K	—								
3	L/K	LD/KD								
	H/K	HD/KD								
	E/K	—								
	NL/K	—								
2	NH/K	—								
	L/K	LD/KD								
	H/K	HD/KD								
	3									
2	S/K	SD/KD	10.0	12.5	33.2	30.0	2.18	3150	6300	12500
3										
2.5										
5										
7.5										
10										